

Document No.: McFunSoft Audio Converter Help Document

# McFunSoft Audio Converter

McFunSoft Inc.


<http://www.mcfunsoft.com>

### Pages Order

<b>Introduction</b> .....	Pages 3
<b>System Requirements</b> .....	Pages 4
<b>How to buy</b> .....	Pages 5-6
<b>Getting Started</b> .....	Pages 7-20
<b>Step by Step</b> .....	Pages 7-10
<b>Audio File Format</b> .....	Page 21-24
<b>About Us</b> .....	Pages 25-26
<b>Appendix</b> .....	Pages 27-30

### Introduction

**McFunSoft Audio Converter** quickly and easily converts your audio files to a ton of formats such as WMA, RAW, G723, G726, Vorbis OGG, Wave, VOX and MP3 format. Using a clear and intuitive interface, you can convert files individually or in batches regardless of their source formats and target formats. You have the options to normalize the volume, encode specific portions, or remove silences. As the audio format conversion is performed directly without any temporary files, Audio Converter enables high converting speed and economy of hard disk resource. Just get Audio Converter to let it do more with your audio converting!

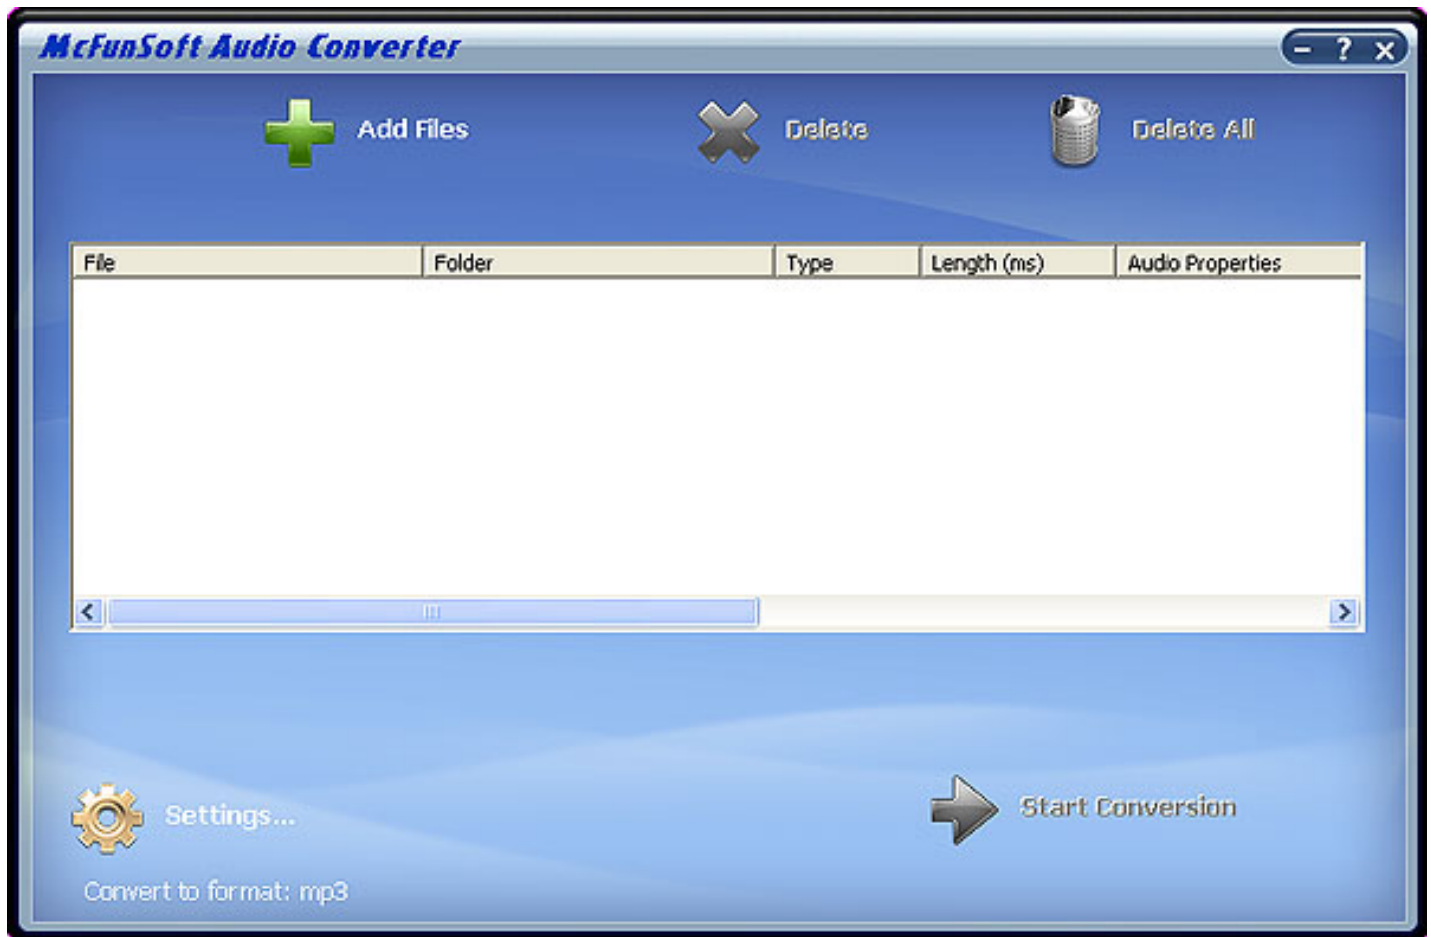

### **System requirements**

To be able to convert audio files quickly, your computer system must meet the following specifications:

- 1, Microsoft Windows 2000/XP/2003/vista (all of the last updates installed are recommended)
- 2, Intel or AMD or compatible processors at 1000 MHz minimum
- 3, RAM 128 megabytes (MB)
- 4, Minimum 50 MB of free hard disk space (When you create an MP3 CD with folders and subfolders, it is required to create a disc image on your hard drive first. For this purpose you need to have approximately 700MB of free space on your hard drive for proper program performance.)
- 5, Administrative permissions are required
- 6, Sound card

### How to buy McFunSoft Audio Converter

As soon as you make your order, our resellers will verify it. Your order will most likely be processed within 1 hour, but in some VERY rare cases it may take resellers more than 24 hours to process your payment.

The registration key will be automatically generated at our server and e-mailed to you immediately after we receive payment confirmation from our e-commerce reseller.

Please do not worry if you haven't received the registration information right away. Delays usually occur due to the high security settings of spam filters used by our clients. Our message may be rejected as a spam message by the mail service you use.

If you haven't got the registration message within several hours, feel free to contact our [Support Team](#) via email.

If you have questions concerning our software, send e-mail to: [sales@mcfunsoft.com](mailto:sales@mcfunsoft.com). **We always do our best to help you!**



**Buy Now**

### Why McFunSoft Audio Converter?

#### Save Time

- a. It is outstanding both in **speed** and **audio quality**.
- b. The **easy-to-use interface** helps you catch on to the system quickly.

#### Save Money

- a. It is your **one-way ticket** to audio converting and creating.
- b. **30-day money-back** guarantee if you are not satisfied with it!

#### Support a wide range of formats

It allows you to convert a wide range of audio formats such as MP3/MP2,WMA,WAV,OGG, MPC,VOX,RAW,G723 and G726.

#### Easy-to-use

With step-by-step manual, enjoyable interface and **one-click process**, you will greatly enjoy your multimedia experience.

### What will you have after purchase?

## **Full version of McFunSoft Audio Converter**

Fun in unlimited audio converting.

## **Free Online Update**(Major Update Not Included)

## **Customer care**

We are pleased to offer our care to meet your needs. We promise that any customer question will be replied within 1 business day!

## **Coupons for McFunSoftproducts in Discount Center**

Great discounts for our customers. See more in [McFunSoft Discount Center](#).

## **Is my order secure?**

As we have for years, we promise the most secure purchase.

[ShareIt](#) and [Emetrix](#), all these McFunSoft partners passed strict certification. We truly believe in 'Only by benefiting our customer can we benefit ourselves'. So your purchase security in McFunSoft is our top priority! McFunSoft has been involved in E-commerce for years. And through these years, we built up a secure online shopping system. You can enjoy the high-speed and convenience we offer.

---

Copyright© 2000-2009 McFunSoft Inc. All Rights Reserved.

### Step1-Getting started

Use the following buttons to create a list of files you want to convert:

Button	Description
Add File(s)	Adds one or several files selected from the specific folder to the file list.
Delete	Removes the highlighted file from the file list.
Delete All	Removes all of the files from the file list.

Right click the file list, you can find an additional menu, which allows you to perform the operations listed above, you can also select all of the files by clicking the Select All or using the Ctrl+A shortcut. You can select files of different formats and from various locations in the file list.

### Step2-Selecting output file format

Select the output format and specify the output parameters such as Frequency, Bit rate and Channels by clicking the **Settings** button.

Note: it is possible to specify fine tuning parameters for MP3 formats when you click the Advanced button. You can find the detailed information about these settings in the Appendix section. See also:

[Available MP3 Parameters Combinations](#)

[Available MP2 Parameters Combinations](#)

[Available Ogg Vorbis Parameters Combinations](#)

### Step3-Selecting output file location

McFunSoft Audio Converter will automatically save all of the output files in **My Music** folder on your computer. To change output file location, please click the Settings button, and then click the Browse button to select desired output location.

---

Copyright© 2000-2009 McFunSoft Inc. All Rights Reserved.

### Step4-Converting process

If everything looks all right, please click the **Start Conversion** button to start converting process.

Note: McFunSoft Audio Converter offers the option to close the program (or shut down windows) after converting process is finished.

You can visually judge the completion of the converting process with the Progress Bar.

You can also cancel converting process by clicking the Cancel button.

---

Copyright© 2000-2009 McFunSoft Inc. All Rights Reserved.

### Selecting the desired file quality

Before you start converting, you have to select the desired sound quality in the Audio Converter Settings window.

#### [MP3](#) Preset Quality:

The easiest way of choosing a level of compression for your MP3 files is to use the Preset Quality slider.

The Preset Quality slider allows you to choose from several levels of quality and resultant file sizes. Higher quality results in larger file size; lower quality results in smaller file size.

Preset	Bit rate	Mode	LAME
Phone	16 kbps	Mono	X
Shortwave	24 kbps	Mono	X
AM Radio	32 kbps	Mono	X
FM Radio*	96 kbps	Stereo	X (J-stereo)
Voice	64 kbps	Mono	X
Radio	112 kbps	X	Stereo
Tape	128 kbps	Stereo	J-stereo
Hi-Fi	160 kbps	Stereo	J-stereo
CD	192 kbps	Stereo	Stereo
Studio	256 kbps	Stereo	Stereo

The default is CD quality (192 kbps, Stereo).

\* Note that the FM Radio bit rate is higher than the next preset quality, which is Voice. Voice is @ 64 kbps and FM Radio is @ 96 kbps. The reason that there is a discrepancy is because Voice is mono and FM Radio is stereo. If you were to divide the FM Radio bit rate in half, you would have 48 kbps per channel, which is lower than the Voice preset.

#### [WMA](#) Quality:

To get to the WMA File Options, go into the Settings and click the Output format - WMA tab.

[WMA](#) is a second generation compressed audio format.

The main option on this screen is the quality format, which is chosen by moving the slider. The possible settings are:

Preset	Bit rate	Mode	Frequency
--------	----------	------	-----------

1	8kbps	Mono	8,000 Hz
2	32 kbps	Stereo	22,050 Hz
3	48 kbps	Mono	44,100 Hz
4	64 kbps	Stereo	44,100 Hz
5	96 kbps	Stereo	44,100 Hz
6	128 kbps	Stereo	44,100 Hz (default)
7	192 kbps	Stereo	44,100 Hz

### **WAV Quality:**

**CD Quality:** This is the most popular setting.

<p><b>CD Quality</b></p> <p>This is the most popular setting. If you are creating WAV files so that you can burn them on custom CD compilations, choose this option. It will ensure that any non-CD quality format WAVs and MP3 files are converted to CD quality compatible WAV files.</p> <p>CD quality format WAV files are 44,100 Hz, 16 bits, stereo.</p>
--

### **Specific Settings:**

<p><b>Specific Settings</b></p> <p>The last alternative can be used for special situations where you need all your resultant WAV files to be in a specific format. For example, you can use this if you need all your WAV files to be mono.</p> <p><b>Sample Rate</b> The sample rate is the number of sound points per second. For example, 22,050 Hz means that there will be 22,050 samples of sound data every second. You can also type in the sample rate if its not in the list.</p> <p><b>Mode</b> Stereo means that the resultant files will have a left and right channel. Mono means that there is only one channel.</p> <p><b>Bits Per Sample</b> Each sample is stored in a finite number of bits. The more bits you use, the less noise is introduced to the sound. However, the file size will also get bigger as higher bits per sample are used. The default is 16 bit. 8 bit sounds may sound noisy especially for subtle dynamic sounds.</p>
---

Please note that the higher you select in sound quality, the more disk space is required to store the converted files.

If you have little disk space left, then this might be a reason to select a lower sound quality.

### MP3 advanced

MP3 Advanced window includes 4 tabs:

[General](#)

[Filtering](#)

[VBR](#)

[Expert](#)

#### General

In the **General** tab you can select the necessary **Channels**. The suggested choice includes the following variants: **Stereo**, **Joint Stereo**, **Forced Joint Stereo**, **Dual Channels** and **Mono**. Read the description of each mode in the table below:

Channel	Description
Stereo	In this mode, the encoder makes no use of potentially existing correlations between the two input channels. It can, however, negotiate the bit demand between both channels, i.e. give one channel more bits if the other contains silence.
Joint stereo	In this mode, the encoder will make use of a correlation between both channels. The signal will be matrixed into a sum ("mid") and difference ("side") signal. For quasi-mono signals, this will give a significant gain in encoding quality. This mode does not destroy phase information like IS stereo that may be used by other encoders. This setting can be used to encode DOLBY ProLogic surround signals.
Forced Joint Stereo	This mode will force MS joint stereo on all frames. It's faster and it uses some special mid and side masking threshold.
Dual Channels	In this mode, the 2 channels will be totally independently encoded. Each channel will have exactly half of the bitrate. This mode is designed for applications like dual languages encoding (for example: English in one channel and French in the other). Using this encoding mode for regular stereo files will result in a lower quality encoding.
Mono	This option will generate a mono file, if the input file is a stereo file, the input stream will be downsampled to a mono file by averaging the left and right channel.

In the right part you will find the opportunity to set **Encoder Quality**. You can specify the output quality; thus you can trade off encoding time against sound quality. The default (normal) is recommended for the lower bit rates (<160 kbps), high quality for bit rates >160 kbps. The voice quality is more or less optimized to generate the best quality for voice

There are some built-in presets you can use. They have for the most part been subject to and tuned via rigorous double blind listening tests to verify and achieve this objective. These are continually updated to coincide with the latest developments that occur and as a result should provide you with nearly the best quality currently possible. You can find them in **Preset** and **Alt-Preset** lists.

**Presets** available:

**Phone, SW, AM, FM, Voice, Radio, Tape, HiFi, CD, Studio, R3Mix.**

**Alt-Presets** available:

Preset	Description
None	Do not use any alt-presets
Fast Standard	VBR mode preset. It should generally be understandable to most people with most music and is already quite high in quality. The resulting bit rate should be within the 170-210 kbps range, according to music complexity. Enables the new fast VBR method for a Standard preset. Its disadvantage is that often the bitrate will be slightly higher than with the normal mode and quality may be slightly lower also.
Standard	VBR mode preset. It should generally be understandable to most people with most music and is already quite high in quality. The resulting bit rate should be within the 170-210kbps range, according to music complexity.
Fast Extreme	VBR mode preset. If you have extremely good hearing and similar equipment, this preset will provide slightly higher quality than the "standard" mode. The resulting bit rate should be within the 200-240 kbps range, according to music complexity. The "fast"-option increases speed significantly but may give a tiny bit lower quality.
Extreme	VBR mode preset. If you have extremely good hearing and similar equipment, this preset will provide slightly higher quality than the "standard" mode. The resulting bit rate should be within the 200-240 kbps range, according to music complexity.
Insane	CBR mode preset. The option gives you the current theoretical maximum quality possible. The output files are flat 320 kbps. Using this may be a little insane, since the difference in quality in between extreme and insane is minimal. However, if you simply don't care about file size, want maximum quality, or you have hardware that can't handle VBR files, then you could use this option.

You can also select **Mpeg Tag Version** out of [ID3 Ver.1](#) or [ID3 Ver.2](#).

### **ID3 Ver.1**

The audio format MPEG layer I, layer II and layer III (MP3) has no native way of saving information about the contents, except for some simple yes/no parameters like "private", "copyrighted" and "original home" (meaning this is the original file and not a copy). A solution to this problem was introduced with the program "Studio3" by Eric Kemp alias NamkraD in 1996. By adding a small chunk of extra data in the end of the file one could get the MP3 file to carry information about the audio and not just the audio itself.

The placement of the tag, as the data was called, was probably chosen as there were little chance that it should disturb decoders. In order to make it easy to detect a fixed size of 128 bytes was chosen. The tag has the following layout (as hinted by the scheme to the right):

Song title	30 characters
Artist	30 characters
Album	30 characters
Year	4 characters
Comment	30 characters
Genre	1 byte

If one sums the size of all these fields we see that  $30+30+30+4+30+1$  equals 125 bytes and not 128 bytes. The missing three bytes can be found at the very beginning of the tag, before the song title. These three bytes are always "TAG" and is the identification that this is indeed a ID3 tag. The easiest way to find a ID3v1/1.1 tag is to look for the word "TAG" 128 bytes from the end of a file.

As all artists doesn't have a 30 character name it is said that if there is some bytes left after the information is entered in the field, those bytes should be filled with the binary value 0. You might also think that you cannot write that much in the genre field, being one byte big, but it is more clever than that. The byte value you enter in the genre field corresponds to a value in a predefined list. The list that Eric Kemp created had 80 entries, ranging from 0 to 79.

### **ID3 Ver.2**

ID3v2 is a new tagging system that lets you put enriching and relevant information about your audio files within them. In more down to earth terms, ID3v2 is a chunk of data prepended to the binary

audio data. Each ID3v2 tag holds one or more smaller chunks of information, called frames. These frames can contain any kind of information and data you could think of such as title, album, performer, website, lyrics, equalizer presets, pictures etc. The block scheme to the right is an example of how the layout of a typical ID3v2 tagged audio file may look like.

One of the design goals were that the ID3v2 should be very flexible and expandable. It is very easy to add new functions to the ID3v2 tag, because, just like in HTML, all parsers will ignore any information they don't recognize. Since each frame can be 16MB and the entire tag can be 256MB you'll probably never again be in the same situation as when you tried to write a useful comment in the old ID3 being limited to 30 characters.

Speaking of characters, the ID3v2 supports Unicode so even if you use the Bopomofo character set you'll be able to write in your native language. You can also include in which language you're writing so that one file might contain e.g. the same lyrics but in different languages.

Even though the tag supports a lot of byte consuming capabilities like inline pictures and even the possibility to include any other file, ID3v2 still tries to use the bytes as efficient as possibly. If you convert an ID3v1 tag to an ID3v2 tag it is even likely that the new tag will be smaller. If you convert an ID3v1 tag where all fields are full (that is, all 30 characters are used in every field) to an ID3v2 tag it will be 56 bytes bigger. This is the worst case scenario for ID3v1 to ID3v2 conversion.

Since it's so easy to implement new functionality into ID3v2, one can hope that we'll see a lot of creative uses for ID3v2 in the future. E.g. there is a built-in system for rating the music and counting how often you listen to a file, just to mention some brainstorm results that are included. This feature can be used to build play lists that play your favorite songs more often than others.

[\[Back to the top\]](#)

## Filtering

**High pass Filter** cuts the lowest frequencies and passes the highest. The **Low pass Filter** allows only the lower frequencies to be present into the output signal; it will cut the beautiful crystal sound of a violin (frequencies over 10 KHz), but if it could amplify rather than just pass the low frequencies, than it would enhance your favorite disco music with lots of percussions and bass.

**High pass filtering frequency (in kHz):** Frequencies below the specified one will be cut off.

**Width of High pass filter (in kHz):** The width of the high pass filter. The default is 15% of the high pass frequency.

**Low pass filtering frequency (in kHz):** Frequencies above the specified one will be cut off.

**Width of Low pass filter (in kHz):** The width of the low pass filter. The default is 15% of the low pass frequency.

Regarding to the Nyquist Sampling Theorem the sample rate have to be at least two times higher than the highest frequency of analog audio signal. For example, the human ear can detect sound across the frequency range of 20 Hz to 20 kHz. According to the sampling theorem, one should sample sound signals at least at 40 kHz in order for the reconstructed sound signal to be acceptable to the human ear.

So applying the low-pass analog filter to a file with sample rate of 8kHz you should take into consideration that the frequency parameter of this method have to be at least two times less ( $< 4$  kHz) than the file's sample rate.

[\[Back to the top\]](#)

## VBR

At **VBR** tab you should select Coding Method first. The description of each method you can find in the table below:

Coding Method	Description
None	Don't use VBR, instead it is encoding with a Constant Bit Rate (CBR)
Default	Use the default VBR method (currently set to VBR-MTRH )
Old	The functional approach, based on masking, bisection in the bit domain
New	The approach, based on masking and direct noise allocation
MTRH	A merger of old and new (VBR) routine
ABR	The Average Bit Rate (ABR) setting, the encoding principle is based on perceptual entropy, but more like CBR than VBR

**Maximum VBR Bitrate:** Allows to specify maximum bit rate when using VBR (Variable Bit Rate), this selecting depends on what base bit rate you have chosen in the main encoder tab. It's recommended to set 320 kbit/s unless you want low quality VBR files.

**VBR Quality:** In VBR mode, you are able to specify a quality setting which will affect encoding bit rate allocation. If you use quality 0, the max bit rate will be reached easily, while using quality 9 the bit rate usually will be around the base bit rate. The lower the VBR quality value, the better the audio quality, but also the bigger the output file. Recommended setting for high quality VBR encoding is 1 or 0.

**Write VBR Header:** This tag is embedded in frame 0 of the MP3 file. It lets VBR aware players correctly seek and calculate playing times of VBR files.

**Target bit rate for ABR:** The allowed range of the ABR bit rate is 4 - 310 kbit/s, you can use any integer value within that range.

[\[Back to the top\]](#)

## Expert

At Expert tab you can find the opportunity to set the following options:

### **Include CRC-Checksum**

When enabled, the encoder will calculate the cyclic redundancy check (CRC) for the MP3 frames, and will add the CRC value to the MP3 stream.

### **Comply as much as possible to ISO MPEG spec**

With this option, the encoder will enforce the 7680 bit limitation on total frame size. This results in many wasted bits for high bit rate encodings.

### **Allow block types to differ between channels**

Allows the left and right channels to use different block types. Normally this is not allowed, only because the FhG encoder does not seem to allow it either.

### **Short blocks**

Encode all frames using short blocks.

### **Bit reservoir**

Enable bit reservoir.

You can also set **ATH Control** function, useful for low volume. ATH is used to approximate an equal loudness curve. Select one of the suggested modes:

<b>ATH Control Mode</b>	<b>Description</b>
Default	
Only	This option ignores the output of the psy-model and only use masking from the ATH. Might be useful at very high bitrates or for testing the ATH.
Disabled	Disable any use of the ATH (absolute threshold of hearing) for masking. Normally, humans are unable to hear any sound below this threshold.
Only for short blocks	Ignore psychoacoustic model for short blocks, use ATH only.

There are also three **De-emphasis** options: **default**, **0/15 microseconds** and **citt j.17**.

[\[Back to the top\]](#)

### **Bit rate**

Bit rate is defined as the number of data points used to approximate the true wave form. Obviously, the higher you set, the more accurately the wave form is approximated.

The CODEC takes the bit rate into consideration as it writes each frame to the bit stream. If the bit rate is low, the irrelevancy and redundancy criteria will be measured harshly, and more subtlety will be stripped out, which results in poorer sound quality. If the bit rate is high, the codec will be applied with leniency, and the sound quality will be better, which will result in larger file size.

Constant Bit Rate (CBR) encoding maintains the same bit rate throughout an encoded file. If your audio has moments of silence, it is captured and encoded at that rate, as are areas of very diverse frequencies (that might sound better if encoded to a higher bit rate).

Variable Bit Rate (VBR) is an MP3 encoding method. As its name implies, the bit rate is varied throughout the file. The codec guesses which parts could benefit from more bits per second, and which can use less. The result is a much higher quality file.

### Frequency

Sampling frequency also impacts fidelity. The sampling frequency is essentially the number of times the sound event is quantized within a given time period. Sampling frequencies are specified in KiloHertz (KHz), a term meaning samples per second. The key in understanding how sampling frequency affects fidelity is the Nyquist sampling theorem. Basically, when applied to audio signals the Nyquist theorem states that the highest possible pitch in the sound is one-half that of the sampling frequency.

For example, "CD-quality" sound requires 16-bit words sampled at 44.1 KHz. Essentially this means 44,100 16-bit words (705,600 bits) are used to digitally describe each second of sound on a compact disc. The highest pitch possible is 22.05 KHz (approximately the top of human hearing range), which is half of 44.1 KHz.

## Audio file formats

McFunSoft Audio Converter supports the following audio formats:

Codec	Description
ADPCM	Compressed WAV format. ADPCM (Adaptive Differential Pulse Code Modulation) is an audio compression scheme which compresses from 16-bit to 4-bit for a 4:1 compression ratio.
ALAW	Compressed WAV format. A-Law (or CCITT standard G.711) is an audio compression scheme common in telephony applications. It is a slight variation of the u-Law compression format, and is found in European systems. This encoding format compresses original 16-bit audio down to 8 bits (for a 2:1 compression ratio) with a dynamic range of about 13-bits. Thus, a-law encoded waveforms have a higher s/n ratio than 8-bit PCM, but at the price of a bit more distortion than the original 16-bit audio. The quality is higher than you would get with 4-bit ADPCM formats. Encoding and decoding is rather fast and generally, widely supported.
DSP	Compressed WAV format. DSP Group True Speech (TM) format.
GSM	Compressed WAV format. Good for keeping human speech.
G.726	Used for computer telephony. Good for keeping human speech.
MP3	MPEG Layer-3 format. Very popular format for keeping music.
PCM	Standard Windows WAV format for non-compressed audio files. Pulse Code Modulation (PCM) is the standard method of digitally encoding audio. It is the basic uncompressed data format used in file types such as Windows .wav.
ULAW	Compressed WAV format. u-Law (or CCITT standard G.711) is an audio compression scheme and international standard in telephony applications. u-Law is very similar to A-Law, a variation of u-Law found in European systems. This encoding format compresses original 16-bit audio down to 8 bits (for a 2:1 compression ratio) with a dynamic range of about 13-bits. Thus, u-Law encoded waveforms have a higher s/n ratio than 8-bit PCM, but at the price of a bit more distortion than the original 16-bit audio. The quality is higher than you would get with 4-bit ADPCM formats. Encoding and decoding is rather fast and generally, widely supported.
VOX	Dialogic ADPCM format. The Dialogic ADPCM format is commonly found in telephony applications, and has been optimized for low sample rate voice. It will only save mono 16-bit audio, and like other ADPCM formats, it compresses to 4-bits/sample (for a 4:1 ratio). This format has no header, so any file format with the extension .VOX will be assumed to be in this format.
RAW	Raw format of audio files. Doesn't contain header of an audio file.
WMA	Windows Media Audio format. A special type of advanced streaming format file for use with audio content encoded with the Windows Media Audio codec. The .wma extension indicates a file format and how the content is encoded.
CCIT U-Law	Compressed WAV format.
Ogg Vorbis	Ogg Vorbis format.

### **MP3 format**

MP3 files contain perceptually encoded sound data.

The frequencies that humans cannot perceive are removed, although some audio purists say they can tell the difference between a high bit-rate MP3 and a Wave file.

A MP3 file is 10 times smaller than an equivalent WAV file.

MP3 files usually end with .mp3, .mp1 or .mp2 file extensions.

**.MP3**

**.MP2**

**.MP1**

### **WMA format**

WMA is acronym for Windows Media Audio. WMA files contain perceptually encoded sound data.

The frequencies that humans cannot perceive are removed, although some audio purists say they can tell the difference between a high bit-rate WMA and a Wave file.

A WMA file can be as much as 20 times smaller than an equivalent WAV file.

### **.WMA**

---

Copyright© 2000-2009 McFunSoft Inc. All Rights Reserved.

### **Wave format**

Wave files usually contain uncompressed PCM audio data.

Sometimes, PCM data may be compressed as ADPCM, GSM or True-Speech.

Wave files end with the .wav extension.

### **.WAV**

---

Copyright© 2000-2009 McFunSoft Inc. All Rights Reserved.

### About McFunSoft

**Take the lead in multimedia;  
Create a Colorful Life!**

Being a shareware developer of multi-media authoring solutions, McFunSoft take the lead in this domain. We have professional experience in the execution of our faith - Think as A Customer. This has given us the idea to create reliable and easy-to-use software.

With our sleek, clear interfaces, McFunSoft R&D Center creates simple solutions to complicated problems

### Contact Us

#### For Customers

Email:

English: [support@mcfunsoft.com](mailto:support@mcfunsoft.com)

French: [support\\_fr@mcfunsoft.com](mailto:support_fr@mcfunsoft.com)

German: [support\\_de@mcfunsoft.com](mailto:support_de@mcfunsoft.com)

Tel:

+1 952 646-5022 (for calls from outside the U.S.)

+1,800,406 4966 (for calls from inside the U.S.)

#### McFunSoft Audio Converter

Product ID: 300222654



We always do our best to answer your question!

#### For Partners

North America:

[sales@mcfunsoft.com](mailto:sales@mcfunsoft.com)

Europe:

[ventes@mcfunsoft.com](mailto:ventes@mcfunsoft.com)



'We benefit together with our partners in a win-win model - the McFunSoft Business Model and we

love to talk about creating with you.



<http://www.mcfunsoft.com>

### Available mp3 parameters combinations

You can find available MP3 parameters combinations in the table below:

Frequency	MONO		Stereo	
	Minimum	Maximum	Minimum	Maximum
48 KHz	64 Kbps	320 Kbps	128 Kbps	320 Kbps
44 KHz	56 Kbps	320 Kbps	112 Kbps	320 Kbps
32 KHz	40 Kbps	320 Kbps	80 Kbps	320 Kbps
24 KHz	32 Kbps	160 Kbps	64 Kbps	160 Kbps
22 KHz	32 Kbps	160 Kbps	56 Kbps	160 Kbps
16 KHz	32 Kbps	160 Kbps	40 Kbps	160 Kbps
12 KHz	24 Kbps	160 Kbps	32 Kbps	160 Kbps
11 KHz	16 Kbps	160 Kbps	32 Kbps	160 Kbps
8 KHz	8 Kbps	160 Kbps	8 Kbps	160 Kbps

Frequency	8 KHz		11.025 KHz		16 KHz		22.05 KHz		24 KHz		32 KHz		44.1 KHz		48 KHz	
	mono	stereo	mono	stereo	mono	stereo	mono	stereo	mono	stereo	mono	stereo	mono	stereo	mono	stereo
8	+	+	+													
16	+	+	+	+	+	+	+	+	+							
24	+	+	+	+	+	+	+	+	+	+						
32	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
40	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
48	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
56	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
64	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
80					+	+	+	+	+	+	+	+	+	+	+	+
96					+	+	+	+	+	+	+	+	+	+	+	+
112					+	+	+	+	+	+	+	+	+	+	+	+
128					+	+	+	+	+	+	+	+	+	+	+	+
144					+	+	+	+	+	+	+	+	+	+	+	+
160					+	+	+	+	+	+	+	+	+	+	+	+
192											+	+	+	+	+	+
224											+	+	+	+	+	+
256											+	+	+	+	+	+
320											+	+	+	+	+	+
384																

### Available mp2 parameters combinations

You can find available MP2 parameters combinations in the table below:

Frequency	16 KHz		22.05 KHz		24 KHz		32 KHz		44.1 KHz		48 KHz	
Bitrate	mono	stereo	mono	stereo	mono	stereo	mono	stereo	mono	stereo	mono	stereo
8	+		+		+							
16	+	+	+	+	+	+						
24	+	+	+	+	+	+						
32	+	+	+	+	+	+	+		+		+	
40	+	+	+	+	+	+	+		+		+	
48	+	+	+	+	+	+	+	+	+	+	+	+
56	+	+	+	+	+	+	+	+	+	+	+	+
64	+	+	+	+	+	+	+	+	+	+	+	+
80	+	+	+	+	+	+	+	+	+	+	+	+
96	+	+	+	+	+	+	+	+	+	+	+	+
112	+	+	+	+	+	+	+	+	+	+	+	+
128	+	+	+	+	+	+	+	+	+	+	+	+
144	+	+	+	+	+	+	+	+	+	+	+	+
160	+	+	+	+	+	+	+	+	+	+	+	+
192							+	+	+	+	+	+
224							+	+	+	+	+	+
256							+	+	+	+	+	+
320							+	+	+	+	+	+
384							+	+	+	+	+	+

MP2 supports all the combinations of the frequency and bit rate if the frequency varies from Minimum to Maximum values for the current supported bit rate.

### Available ogg parameters combinations

You can find the available ogg parameters combinations in the table below:

Frequency	Mono		Stereo	
	Minimum	Maximum	Minimum	Maximum
48 KHz	48 Kbps	192 Kbps	48 Kbps	320 Kbps
44 KHz	48 Kbps	128 Kbps	48 Kbps	256 Kbps
32 KHz	48 Kbps	112 Kbps	48 Kbps	192 Kbps
24 KHz	32 Kbps	56 Kbps	48 Kbps	160 Kbps
22 KHz	32 Kbps	56 Kbps	48 Kbps	160 Kbps
16 KHz	48 Kbps	96 Kbps	48 Kbps	192 Kbps
12 KHz	32 Kbps	48 Kbps	48 Kbps	96 Kbps
11 KHz	48 Kbps	48 Kbps	48 Kbps	64 Kbps
8 KHz	8 Kbps	24 Kbps	16 Kbps	48 Kbps

Ogg Vorbis supports all the combinations of the frequency and bit rate if the bit rate varies from Minimum to Maximum values for the current supported frequency.

### Audio converter keystrokes

This is a list of the functions in the Audio Converter, which can be operated by pressing certain keys on the keyboard:

Key:	Function:
F9	Start converting
Ctrl+P	Play the selected file
Alt+F4	Exit
Ctrl+A	Select all files
Ctrl+N	Select none
Del	Delete select files from list
Ctrl+U	Move up
Ctrl+D	Move down
F1	Help